

PERIMETER SEALS


LAS1206K & LAS1212K Batwing® on-a-stick

MEDIUM DUTY

Medium duty, acoustic and smoke perimeter seals; which minimise the opening and closing resistance of the door leaf due to their unique, curved fins. Flexible elastomeric fin material springs back to original shape to provide ongoing performance and durability in service. They can be fitted with minimal disruption to the door assembly.




ACOUSTIC, SMOKE + FIRE SEALS



▲ LAS1206K
Batwing®
on-a-stick

▲ LAS1212K
Batwing®
on-a-stick

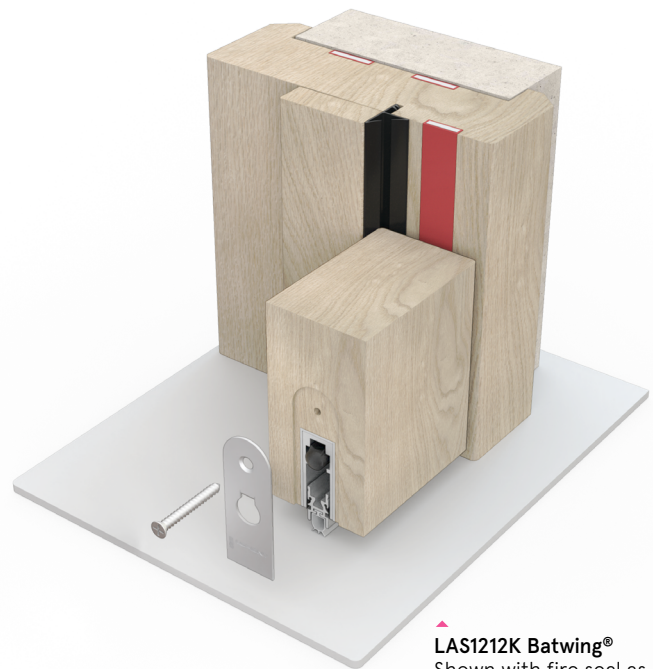

▲ LAS1212K Batwing®
Shown with fire seal as
referenced in CNA/F14171
(also shown with LAS8001 si)

SYSTEM SPECIFICATIONS

Test evidence

- ▶ Smoke: BS 476-31.1:1983.
- ▶ Acoustic: BS EN ISO 10140-2:2010 (up to Rw 37dB).
- ▶ Durability: 100,000 cycles.

Performance

- ▶ Meets smoke requirement: BS 9999:2017.
- ▶ Protects against sound, smoke, draught and light.

Location

- ▶ Head and jambs of single and double leaf doors.

Use with

- ▶ Any fire seals or architectural seals.

Min/max gap size

- ▶ 3mm/4mm.

Seal material

- ▶ Co-extruded rigid back PVC with flexible fins.

Standard lengths

- ▶ 1m and 2.1m.
- ▶ Single doorset pack consisting of 1 x 1m and 2 x 2.1m.
- ▶ Other lengths to special order.

Fixing

- ▶ Heavy duty self-adhesive backing tape.
- ▶ Groove size for LAS1206K is 3mm x 11mm.
- ▶ Groove size for LAS1212K is 3mm x 9mm.

Colours

- ▶ Black, white, dark brown, light brown and grey as standard.
- ▶ Silver, cream, red and clear available to special order.
- ▶ Note: clear Batwing® will not prevent light penetration.

Certification